

# BLAZE 56W & 56WE

White LED Floodlights, PoE or Low Voltage



## Easy Integration and Control

Blaze lights have a built-in light sensor and can be setup to turn ON/OFF depending on lighting conditions. Or, use the light's I/O ports to connect to a camera, sensor or other I/O port device to turn the light ON/OFF based upon pre-set conditions.

## Range and Input Power Options

Match the lights beam angle to your sites lighting requirements by choosing a lens angle from the range chart below. Choose low voltage 56W or PoE powered 56WE.


## Lifetime Warranty - Made in the USA

AXTON Lights are covered by a lifetime warranty and are designed and manufactured in the USA.

## FEATURES

- White Light - 9,500 lumens
- Outdoor IP67 Rated
- Energy Efficient - 56 Watts
- Advanced LED Technology
- I/O Port Sync with Sensors, Devices
- Automatic Day/Night Sensor
- Designed and Manufactured in the USA
- Lifetime Warranty

## RANGE

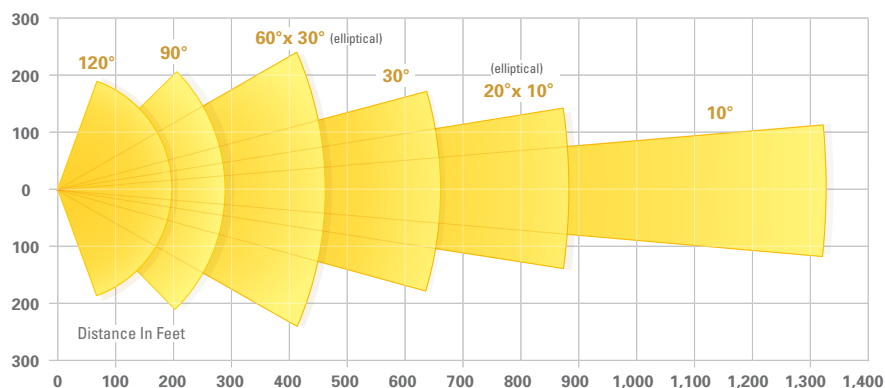

Angle: **120°**  
Range: 203'/62m  
HFOV: 352'/107m

Angle: **90°**  
Range: 297'/90m  
HFOV: 382'/117m

Angle: **60°x30°**  
Range: 462'/140m  
HFOV: 462'/140m

Angle: **30°**  
Range: 660'/201m  
HFOV: 341'/104m

Angle: **20°x10°**  
Range: 880'/268m  
HFOV: 275'/83m

Angle: **10°**  
Range: 1320'/402m  
HFOV: 230'/70m

## SPECIFICATIONS

White Light	Lumens: 9,500/ Temp: 5000K
56W - Input Voltage	24-36VDC or 24VAC
56WE - Input Voltage	PoE++ (36 VDC auxiliary optional)
Angle/Range Options:	120°, 90°, 60°x30°, 30°, 20°x10° or 10°
Power Consumption	56 Watts
Operating Temp.	-58° to 140°F / -50° to 60°C
Dimensions	6.25" x 3.5" x 9.25" / 159 x 89 x 235mm
Weight	5.5 lbs / 2.5kg
Environmental	Outdoor IP67 Rated
Mounting	Pan/Tilt U Bracket Included

