

Linear 36WL

Linear White Floodlight



Linear White Floodlight

Linear White Floodlights can be mounted either horizontally or vertically, depending on the site, to provide illumination in the desired area.

Easy Integration and Control

Seamless and precise integration via input output (I/O) ports. Sync with a camera or any other system device with I/O capability. Linear Lights also feature a 0-10V analog dimming port for light intensity control.


Lifetime Warranty - Made in the USA

AXTON Lights are covered by a lifetime warranty with advanced replacement.

FEATURES

- White Light - 6,100 Lumens
- Outdoor IP67 Rated
- Illumination Range 420ft x 320ft
- Energy Efficient Advanced LED Technology
- I/O Port Sync with Sensors, Devices
- Analog Dimming (external 0-10V required)
- Lifetime Warranty, Made in the USA

RANGE

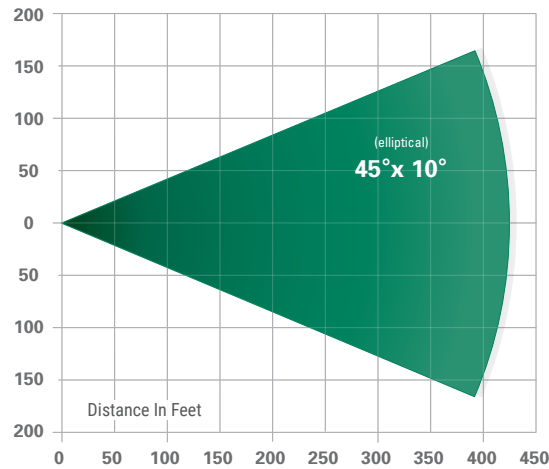


ANGLE:	45° x 10°
RANGE:	420ft / 128m
HFOV:	320ft / 97m

SPECIFICATIONS

White Light	Lumens: 6,100 Lm/ Temp: 5000K
Input Voltage	12 or 24 VDC
Power Consumption	36 Watts
Beam Angle:	45° x 10° (elliptical)
Operating Temp.	-58° to 140°F / -50° to 60°C
Dimensions	15.6" x 3.75" x 2.12" / 396 x 95 x 54mm
Weight	6lb / 2.7kg
Environmental	Outdoor IP67 Rated
Mounting	Mounting Brackets Included

Light Intensity Distribution

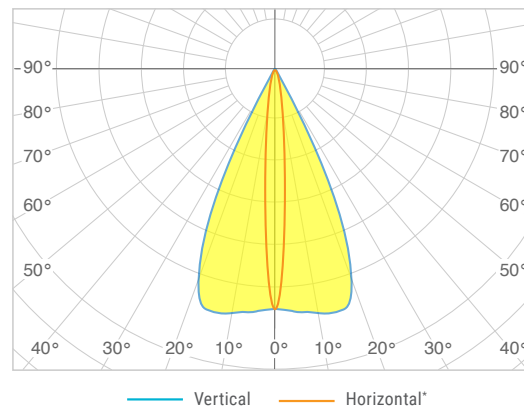

Note: *The above color key is for a Linear light mounted vertically. For a horizontally mounted light, the colored lines would represent the reversed.

