

# Tactical 11T, 11TE & 11TY

940nm IR Illuminator, 24V DC/AC, PoE & Off-Grid

**AXTON**  
ILLUMINATE THE NIGHT



## Covert 940nm IR Illuminator

The Tactical 11T(\*) is a fully covert 940nm IR Illuminator with no red glow at the LED source. The Tactical 11T is available in three power input options: 24V DC/AC, PoE or Solar/Battery power.

## Easy Integration and Control

Seamless and precise control via Input/Output ports. Sync with camera, sensors or other system devices with I/O ports. For easy integration, a built-in photocell sensor can be used to turn the IR ON/OFF based upon ambient lighting conditions.


## Designed & Manufactured in the USA, Lifetime Warranty

AXTON Lights are designed & manufactured in the USA and are covered by a lifetime warranty.

## FEATURES

- Fully Covert 940nm Infrared
- Rugged & Vandal Resistant
- I/O Port Sync with Sensors, Devices
- Automatic Day/Night Sensor
- Outdoor IP67 Rated
- Lifetime Warranty, USA Made


## RANGE

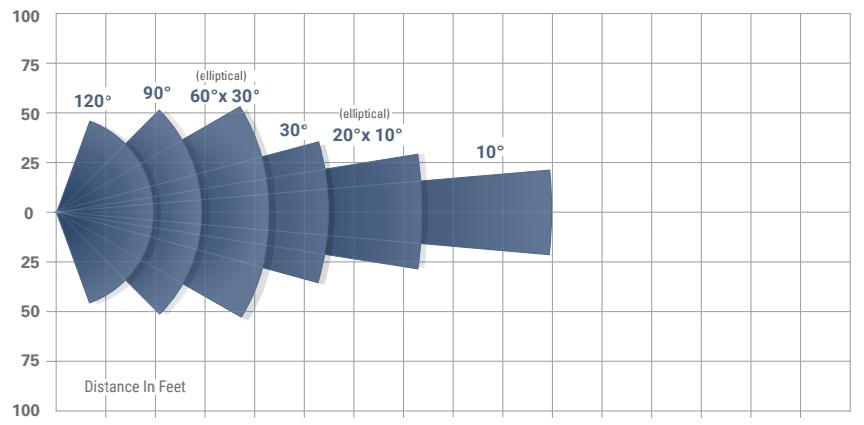

Angle: 120° Range: 49ft / 15m HFOV: 84ft / 25m	Angle: 90° Range: 73ft / 22m HFOV: 102ft / 31m	Angle: 60° x 30° Range: 105ft / 32m HFOV: 105ft / 32m	Angle: 30° Range: 140ft / 42m HFOV: 68ft / 20m	Angle: 20° x 10° Range: 180ft / 55m HFOV: 54ft / 16m	Angle: 10° Range: 250ft / 76m HFOV: 47ft / 14m
--	--	---	--	--	--

## SPECIFICATIONS

Wavelength	940nm Infrared
Input Voltage Options:	11T: 24 to 36 VDC or 24 VAC 11TE: PoE (or PoE+) 11TY: 9-28 VDC (Solar/Battery)
Beam Angle Options*	120°, 90°, 60° x 30°, 30°, 20° x 10° or 10°
Power Consumption	11 Watts
Operating Temp.	-58° to 140°F / -50° to 60°C
Dimensions	4.25" x 2" x 4.25" / 108 x 51 x 108mm
Weight	1.2 lbs / .54 kg
Environmental	Outdoor IP67 Rated
Mounting	Pan/Tilt U Bracket Included

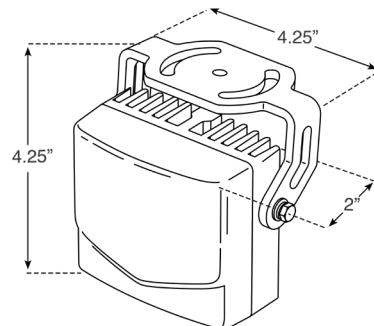

**AXTON**  
ILLUMINATE THE NIGHT

801 Robinson Drive, Suite #500, North Salt Lake, UT 84054  
Tel: 801/519-0500 • Email: sales@axtontech.com • Website: axtontech.com