

Tactical 56T, 56TE & 56TY

940nm IR Illuminator, 24V DC/AC, PoE+ or Off-Grid



Covert 940nm IR Illuminator

The Tactical 56T(*) is a fully covert 940nm IR Illuminator with no red glow at the LED source. The Tactical 56T is available in three power input options: 24V DC/AC, PoE++ or Solar/Battery.

Easy Integration and Control

Seamless and precise control via Input/Output ports. Sync with camera, sensors or other system devices with I/O ports. For easy integration, a built-in photocell sensor can be used to turn the IR ON/OFF based upon ambient lighting conditions.


Designed & Manufactured in the USA, Lifetime Warranty

AXTON Lights are designed & manufactured in the USA and are covered by a lifetime warranty.

FEATURES

- Fully Covert 940nm Infrared
- Rugged & Vandal Resistant
- I/O Port Control with Sensors, Camera
- Automatic Day/Night Sensor
- Outdoor IP67 Rated
- Lifetime Warranty, USA Made

RANGE

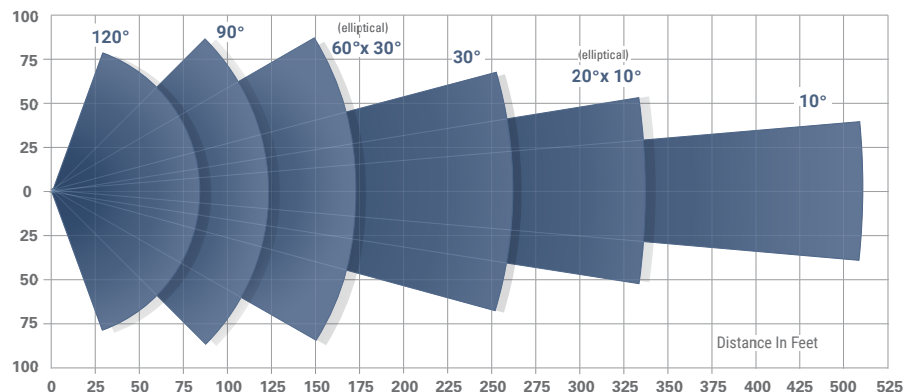

Angle: **120°**
Range: 80ft / 24m
HFOV: 153ft / 46m

Angle: **90°**
Range: 125ft / 38m
HFOV: 172ft / 52m

Angle: **60°x 30°**
Range: 175ft / 53m
HFOV: 175ft / 53m


Angle: **30°**
Range: 260ft / 79m
HFOV: 137ft / 42m

Angle: **20°x 10°**
Range: 340ft / 103m
HFOV: 101ft / 31m

Angle: **10°**
Range: 510ft / 155m
HFOV: 74ft / 22m

SPECIFICATIONS

Wavelength	940nm Infrared
Input Voltage Options:	56T: 24-36 VDC or 24 VAC 56TE: PoE++ 56TY: 9-28 VDC (OFF-GRID)
Beam Angle Options	120°, 90°, 60° x 30°, 30°, 20°x10° or 10°
Power Consumption	56 Watts
Operating Temp.	-58° to 140°F / -50° to 60°C
Dimensions	6.25" x 3.5" x 9.25" / 159 x 89 x 235mm
Weight	5.5 lbs / 2.5kg
Environmental	Outdoor IP67 Rated
Mounting	Pan/Tilt U Bracket Included

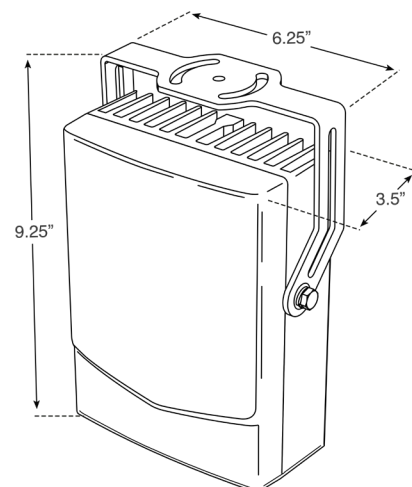

801 Robinson Drive, Suite #500, North Salt Lake, UT 84054
Tel: 801/519-0500 • Email: sales@axtontech.com • Website: axtontech.com

