

Flex 25X

Three Built-in Angle Options



Three Angles in One IR Illuminator

The FLEX AT-25X-S multiple angle IR Illuminator includes three angles: 150°, 60°x 30° & 20° x 10°. The beam angle can be switched electronically via the I/O ports.

Easy Integration and Control

Seamless and precise control via Input/Output ports. Sync with camera, sensors or other system devices with I/O ports. For easy integration, a built-in photocell sensor can be used to turn the IR ON/OFF based upon ambient lighting conditions.


Designed & Manufactured in the USA, Lifetime Warranty

AXTON Lights are designed & manufactured in the USA and are covered by a lifetime warranty.

FEATURES

- All Angle Options in One Illuminator
- Rugged & Vandal Resistant
- I/O Port Control with Sensors, Camera
- Automatic Day/Night Sensor
- Outdoor IP67 Rated
- Lifetime Warranty, USA Made

RANGE

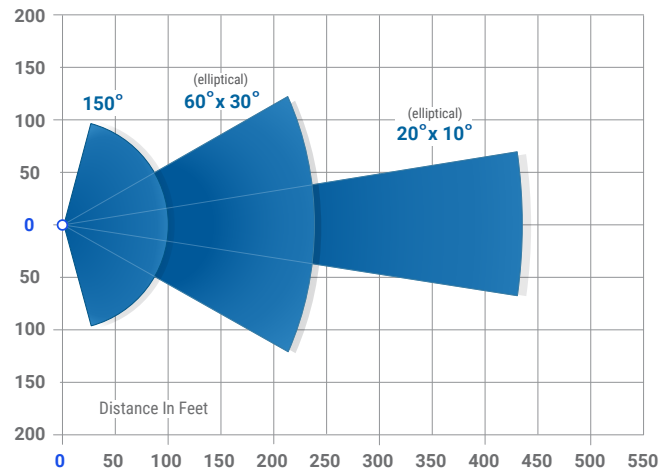

ANGLES


Angle: **150°**
Range: 94ft/28m
HFOV: 195ft/59m

Angle: **60°x 30°**
Range: 230ft/70m
HFOV: 230ft/70m

Angle: **20°x 10°**
Range: 430ft/131m
HFOV: 150ft/45m

SPECIFICATIONS

Wavelength	850nm Infrared
Input Voltage	24-36VDC or 24VAC
Angles:	150°, 60°x30°, 20°x10°
Power Consumption	15 Watts
Operating Temp.	-58° to 140°F / -50° to 60°C
Dimensions	5.25" x 3" x 7.25" / 133 x 76 x 184mm
Weight	3 lbs /1.3kg
Environmental	Outdoor IP67 Rated
Mounting	Pan/Tilt U Bracket Included

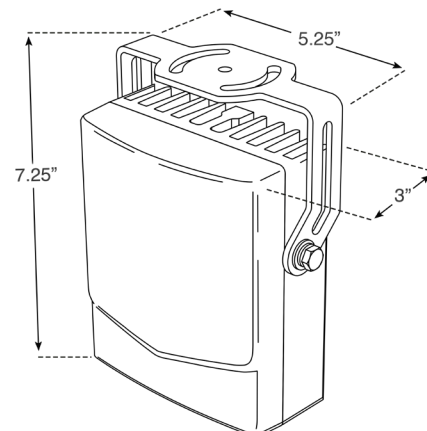

801 Robinson Drive, Suite #500, North Salt Lake, UT 84054
Tel: 801/519-0500 • Email: sales@axtontech.com • Website: axtontech.com

