

MegaPixel 11E

PoE Powered IR Illuminator



MegaPixel PoE Powered Infrared

Simple PoE installation, just connect the lights CAT5e/CAT6 cable to a PoE or PoE+ midspan. Choose from six range/angle options to match the light to the camera's field of view. MegaPixel IR Illuminators are outdoor IP67 rated, rugged and vandal resistant.

Easy Integration and Control

Seamless and precise control via Input/Output ports. Sync with camera, sensors or other system devices with I/O ports. For easy integration, a built-in photocell switches the IR ON/OFF based on lighting conditions.


Lifetime Warranty - Made in the USA

AXTON Lights are covered by a lifetime warranty with advanced replacement.

FEATURES

- Wavelength - 850nm Infrared
- Outdoor IP67 Rated
- Energy Efficient - 11 Watts
- Advanced LED Technology
- I/O Port Sync with Sensors, Devices
- Automatic Day/Night Sensor
- Lifetime Warranty, Made in the USA

RANGE

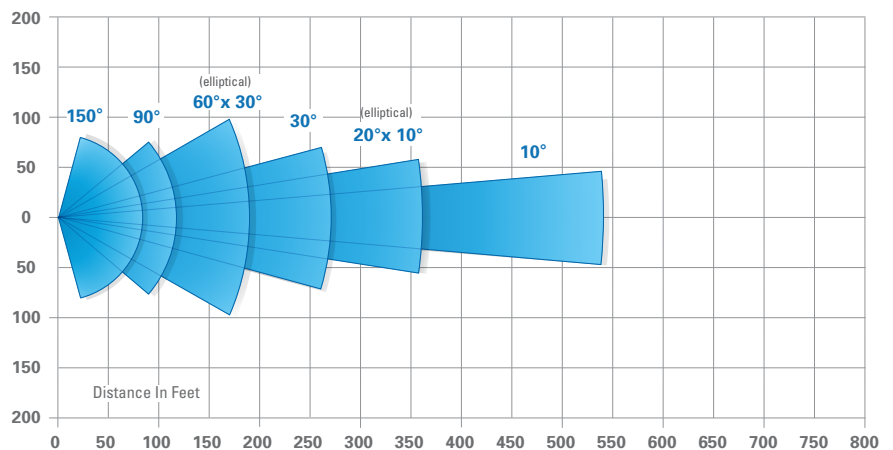

Angle: **150°**
Range: 80ft /24m
HFOV : 155ft /47m

Angle: **90°**
Range: 120ft /36m
HFOV : 152ft /46m

Angle: **60° x 30°**
Range: 190ft /58m
HFOV : 190ft /58m


Angle: **30°**
Range: 270ft /82m
HFOV : 140ft /42m

Angle: **20° x 10°**
Range: 360ft /109m
HFOV : 112ft /34m

Angle: **10°**
Range: 540ft /164m
HFOV : 94ft /28m

SPECIFICATIONS

Wavelength	850nm Infrared
Input Voltage	PoE (or PoE+)
Angle/Range Options:	150°, 90°, 60°x30°,30°,20°x10° or 10°
Power Consumption	11 Watts
Operating Temp.	-58° to 140°F / -50° to 60°C
Dimensions	4.25" x 2" x 4.25" /108 x 51 x 108mm
Weight	1.25 lbs/ .56kg
Environmental	Outdoor IP67 Rated
Mounting	Pan/Tilt U Bracket Included

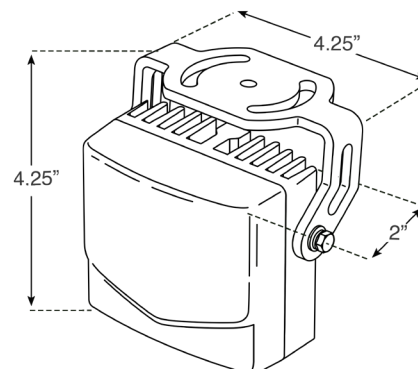

801 Robinson Drive, Suite #500, North Salt Lake, UT 84054
Tel: 801/519-0500 • Email: sales@axtontech.com • Website: axtontech.com

